

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 September 2004 (10.09.2004)


PCT

(10) International Publication Number  
**WO 2004/076323 A1**

- (51) International Patent Classification<sup>7</sup>: **B66B 1/34** **TERRY, Harold** [GB/US]; 73 Deepwood Drive, Avon, CT 06001 (US).
- (21) International Application Number: PCT/US2003/005700 (74) Agent: **OLDS, Theodore**; Carlson, Gaskey & Olds, Suite 350, 400 West Maple Road, Birmingham, MI 48009 (US).
- (22) International Filing Date: 24 February 2003 (24.02.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **OTIS ELEVATOR COMPANY** [US/US]; Ten Farm Springs Road, Farmington, CT 06032 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **FLYNN, Michael** [US/US]; 63 Brookmoor Road, Avon, CT 06001 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: ELEVATOR WITH VARIABLE DRAG FOR CAR AND COUNTERWEIGHT

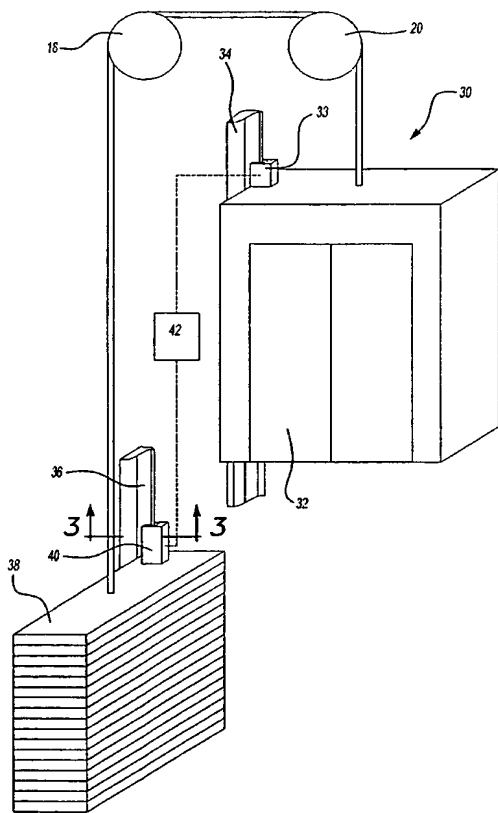

(57) Abstract: An elevator car and counterweight system is provided with a variable drag element. The variable drag element is controlled such that the lower of the counterweight and the car has a higher drag against further movement. In an embodiment which is particularly useful in a 2:1 roping system, the sheaves (54, 58) associated with the counterweight (56) and the car (60) receive a braking/drive motor (62, 64) to provide the variable drag. While the present invention provides the variable drag to compensate for vertical differences between the counterweight and car, the invention can also be utilized to hold the car at a particular floor. Further, this invention can be utilized to address a counterweight or car jump situation. Another disclosed drag element may be a magnetizable member (40, 33) guided along a guide rail (34, 36) for each of the car (32) and the counterweight (38). A control controls the magnetic force associated with the guide elements to hold the car or prevent counterweight jump.

WO 2004/076323 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,  
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

2/875

**ELEVATOR WITH VARIABLE DRAG FOR  
CAR AND COUNTERWEIGHT**

**BACKGROUND OF THE INVENTION**

5           This application relates to an improvement to vary the drag associated with an elevator car and counterweight, particularly as each approach extreme ends of their travel range.

          Elevators are typically provided with an elevator car that moves upwardly and downwardly within an elevator shaft. As is known, and as shown somewhat  
10       schematically in Figure 1, the car 12 is balanced by a counterweight 14. The two are connected by a rope 16. Sheaves 18 and 20 guide the rope.

          In the prior art, and particularly as the elevator car or counterweight reach extreme ends of travel, one of the two becomes lighter than the other. The hoist rope is more on one side and thus the hoist rope adds more weight to the lower of the hoist  
15       car and counterweight. This raises some complications and challenges in providing smooth travel for the car 12. In particular, in very high rise applications, the provision of adequate counterweight balance forces at extreme positions of the counterweight or car becomes very challenging. Thus, compensating ropes 22 have sometimes been utilized. It would be desirable to eliminate the compensating ropes, such as rope 22.

20           Other issues with regard to the control of movement of an elevator car and counterweight include a problem known as "releveling" in which the car may move slightly once stopped at a floor. Further, a condition known as "counterweight jump" or "car jump" can occur at the end of travel if the car or counterweight strikes a buffer in the pit. The other of the car or counterweight may continue in an upward direction  
25       due to stored inertia. The rope tension on the lower element may become low such that its rope can become slack resulting in slip at the traction sheave. As the counterweight subsequently drops, the rope will become taut again.

          Thus, the present invention eliminates the need for compensating ropes, and provides smoother travel for the elevator particularly at extreme ranges of travel.

30

### **SUMMARY OF THE INVENTION**

In one disclosed embodiment of this invention, a variable drag is associated with both the car and the counterweight. The drag is increased on the lighter of the two elements as they approach their extreme ends of travel. At the same time, the other element is driven. Thus, as the counterweight reaches lower points of travel, and conversely the car reaches higher points of travel, the car will become lighter relative to the counterweight, due to the hoist rope. The drag associated with the car will then be made to be higher than the drag associated with the counterweight. The counterweight rope portion is driven. In this way, the differences in weight can be addressed.

In an embodiment that is particularly useful in a 2:1 arrangement, the lower sheaves for the counterweight and car are provided with braking/drive motors. The braking motors thus provide the variable drag on one sheave such as described above while driving the other sheave.

A control monitors position and/or speed of the car and counterweight and controls the drag accordingly.

While the present invention is particularly useful to compensate for differences in weight between the counterweight and car during travel, the drag control elements can also be utilized to hold the car at a select position such as while it is stopped at a floor.

Another feature provided by this invention occurs if the car or counterweight strikes the buffer in the pit. The other of the car and counterweight will then continue in an upward direction due to stored inertia. In this event, the rope tension on the upwardly moving element becomes low such that the rope becomes briefly slack and may result in slip at the traction sheave, and perhaps jerk as the element subsequently drops and the rope again becomes taut. The present invention also allows the control feature of activating the drag control if such a strike is sensed. This reduces dynamic forces on the suspension ropes and the building.

In another embodiment that can be used in 1:1 elevator arrangements, a magnetically controlled element with a variable magnetic force is guided on the guide rails for the car and the counterweight. By controlling the magnetic force, the amount of drag on the car and the counterweight can be controlled relative to each other.

While this embodiment may not eliminate compensating ropes, the "hold" and "strike" features mentioned above can be provided by this embodiment.

These and other features of the present invention can be best understood from the following specification and drawings, the following of which is a brief description.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 shows a prior art elevator arrangement.

Figure 2 is a schematic view of an inventive system.

Figure 3 shows another embodiment

Figure 4 is a cross-sectional view through a portion of the Figure 3 embodiment.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Figure 2 shows an embodiment 50 that is a 2:1 arrangement between the car 68 and the counterweight 56. As is shown, with such an arrangement, the rope 52 passes over sheaves 54 and 58 associated with the counterweight 56 and car 60, respectively. The sheaves 54 and 58 are provided with braking/drive motors 62 and 64 under the control of an elevator control such as control 42. The operation of the braking/drive motor serves to provide a variable drag upon the roller sheaves 54 and 58, to achieve the following control functions.

A control 42 controls both motors 54 and 58. In the illustrated position, the counterweight 56 is moving lower than the car 32. With this movement, the counterweight 56 will reach a higher weight than the car 60. In such a situation, the counterweight would not be acting to provide the counterweight benefit as adequately as if the car and counterweight were at more approximately equal vertical positions. This problem becomes particularly acute in very high rise applications. Thus, when the counterweight is below the car, the motor 64 is controlled to brake sheave 54 to compensate for the greater weight of counterweight 56. At the same time, the other motor 62 brakes sheave 58 to compensate for the imbalance. Conversely, when the car is near the bottom of the path of travel, motor 62 will be controlled to brake sheave 58, with sheave 54 being braked by motor 64. Similarly, when the car or

counterweight is at the bottom of the hoistway and it has to move upward, the motors 62 and 64 on the car and counterweight would drive the sheaves 54 and 58, thereby equalizing the rope tension on car and counterweight. Such control can be utilized based upon position or speed of the counterweight 56 or car 60. The control 42 is well within the ability of a worker in this art, and determining the amount of drag to compensate for the imbalance in height would also be well within the skill of a worker in this art. Moreover, information such as position and/or speed is already typically provided to a control for elevators, and thus the provision of the necessary inputs for control 42 to operate to control the motors 62 and 64 is within the skill of a worker in this art.

This embodiment thus allows a variable drag to be applied to either the counterweight or car to control imbalances in weight due to extreme differences in the vertical position of the counterweight and car. This provides benefits as would be appreciated within this art. Braking/drive motors 62 and 64 can also be utilized to hold the car at a desired location, and eliminate releveled. The variable drag can be utilized to hold the car at a floor. Thus, while stopped at a floor, the car may be held at an exact desired position.

Another feature provided by this invention occurs if the car or counterweight strikes the buffer in the pit. The other of the car and counterweight will then continue in an upward direction due to stored inertia. In this event, the rope tension on the upwardly moving element becomes low such that the rope becomes briefly slack and may result in slip at the traction sheave, and perhaps jerk as the element subsequently drops and the rope again becomes taut. The present invention also allows the control feature of activating the drag control if such a strike is sensed. This reduces dynamic forces on the suspension ropes and the building.

An elevator system 30 is illustrated in Figure 3 having a car 32 provided with a drag element 33 to be guided on guide rails 34. As is known, cars are guided on guide rails in standard elevator systems. However, as will be explained in greater detail below, the drag element 33 is operated to control the amount of drag between the element and the guide rail. A similar guide rail 36 guides the counterweight 38 through a similar drag control member 40.

While it is preferred, a drag element is associated with both the car and counterweight, it is possible a single drag element associated with either the car or counterweight could achieve the control.

5 As shown in Figure 4, in one embodiment, the rail 36 receives sides 44 of the drag control element 40. These sides include magnetizable materials that can be controlled by an electric current to control the amount of magnetic force. In this way, the drag provided along the guide rails 36 and 34 by the elements 33 and 40, respectively, can be varied and controlled.

10 The second embodiment shown in Figures 3 and 4 will address the releveling and counterweight or car jump problem discussed above.

Although preferred embodiments of this invention have been disclosed, a worker of ordinary skill in this art would recognize that certain modifications would come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

15

**CLAIMS**

1. An elevator system comprising:  
an elevator car;  
5 a counterweight;  
a rope connecting said elevator car and said counterweight; and  
a drag element associated with at least one of said car and said counterweight, a control controlling the amount of drag between said car and said counterweight through said drag element to control movement of said car and said counterweight under at least some conditions.  
10
2. An elevator system as set forth in Claim 1, wherein said drag element includes a magnetizable member which is guided along a guide rail for said one of said car and said counterweight.  
15
3. An elevator system as set forth in Claim 1, wherein a drag element is associated with each of said car and said counterweight.
4. An elevator system as set forth in Claim 3, wherein said control  
20 controls said drag elements based upon the vertical position of said car and said counterweight.
5. An elevator system as set forth in Claim 4, wherein said control controls said drag elements to ensure that the vertically lower of said car and said counterweight is provided with a lower drag than the vertically higher of said car and counterweight.  
25
6. An elevator system as set forth in Claim 5, wherein said counterweight and said car are linked together in a 2:1 arrangement, and a sheave is associated with  
30 said counterweight and said car, and said drag elements are associated with said sheave on at least one of said counterweight and said car.



7. An elevator system as set forth in Claim 6, wherein said drag elements are braking/drive motors.

8. An elevator system as set forth in Claim 1, wherein a control senses for a potential "jump" situation as one of said counterweight and car reach an end of travel position, and said drag element being actuated should a jump condition be identified.

9. An elevator system as set forth in Claim 1, wherein said drag element is utilized to hold said car at a floor.

10. A method of controlling the travel of an elevator car comprising the steps of:


(1) providing an elevator car linked to a counterweight through a rope;

(2) providing a drag element associated with at least one of said car and said counterweight, and said drag element being capable of providing a variable drag under the control of a control element; and


(3) monitoring the vertical position of at least one of said car and said counterweight, and controlling the variable drag of said drag elements such that the vertically lower of said counterweight and said car has a higher drag resistance.

11. The method of Claim 10, wherein step (2) includes providing a drag element to each of said car and said counterweight.


1/2

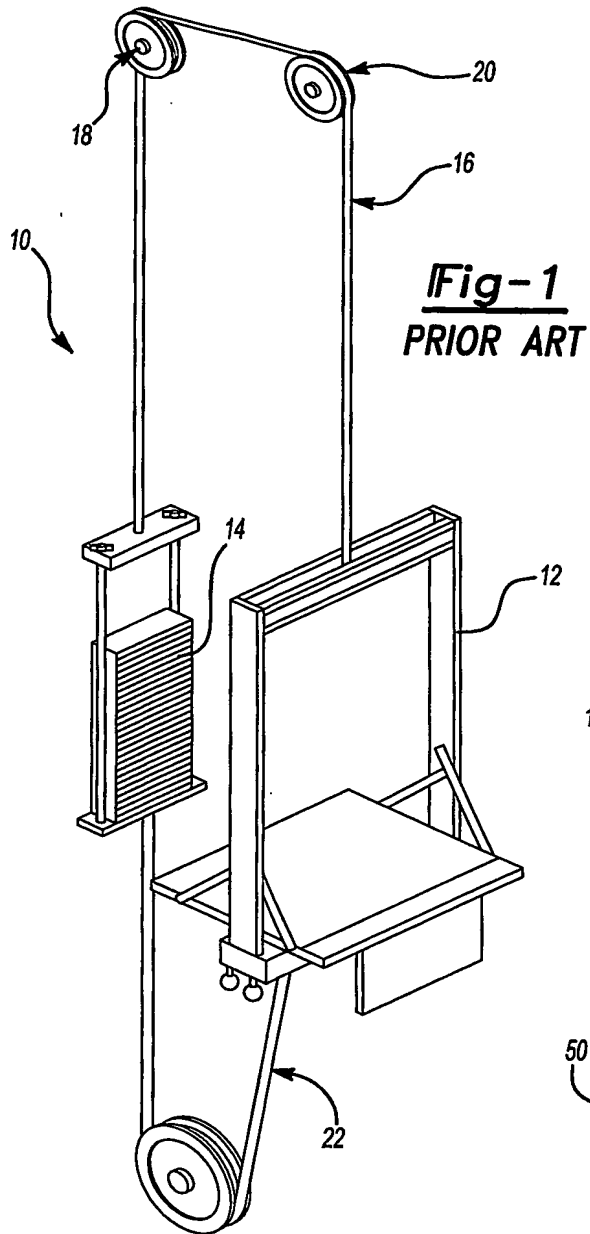

**Fig-2**

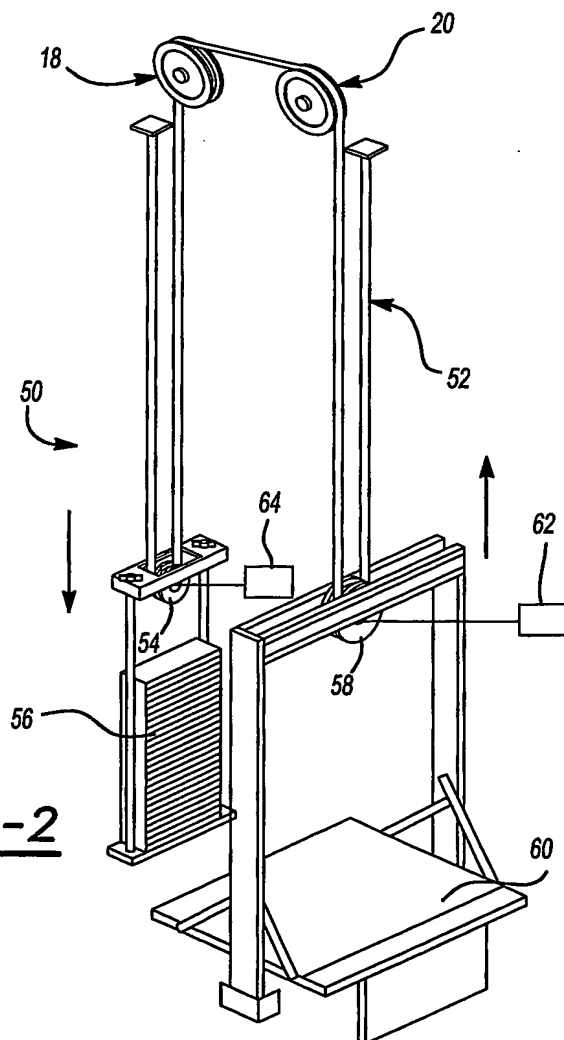

2/2

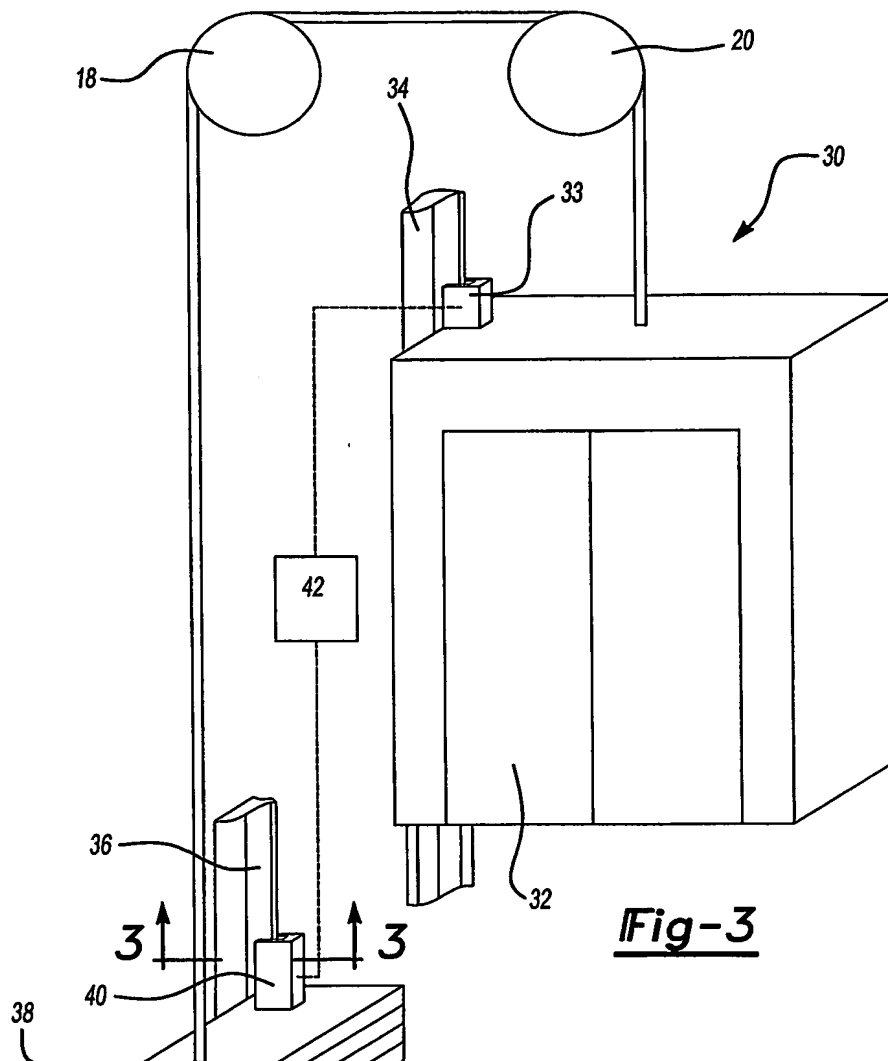

**Fig-3**

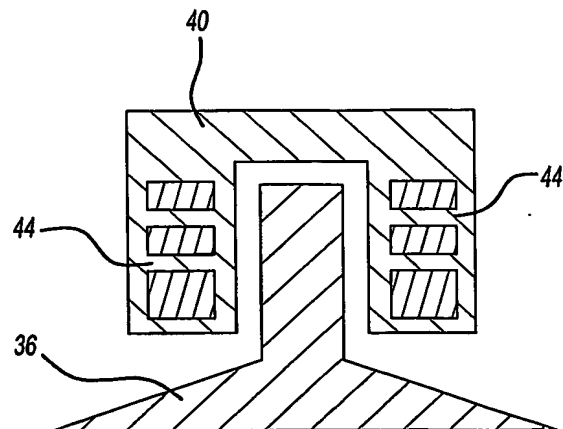


Fig-4

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/05700

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B66B 1/34

US CL : 187/284, 292, 256, 406, 408

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 187/284, 292, 256, 406, 408

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
USPTO APS EAST

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y --- A	US 4,570,755 A (TSAI et al) 18 February 1986 (18.02.1986), see entire document.	1-4, 8-11 ----- 5-7
Y --- A	US 2,874,806 A (OPLINGER) 24 February 1959 (24.02.1959), see figures 4, 8, 11.	1-4, 8-11 ----- 5-7
A	US 3,207,265 A (LUND et al) 21 September 1965 (21.09.1965), see figures 1, 4, 6, 9.	1-11

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

07 July 2003 (07.07.2003)

Date of mailing of the international search report

05 SEP 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Jonathan Salata

Telephone No. (703) 308-0956

*Renee Patton*